



Rec'd PCT/PTO

21 DEC 2004

INVESTOR IN PEOPLE

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

REC'D 20 OCT 2003

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Stephen Hordley

Dated 6 August 2003


BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

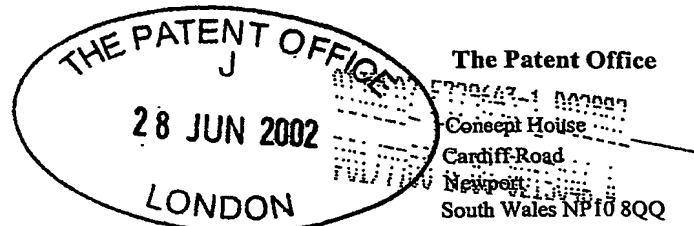

1.	Your reference	MGDB/HFL/60701/000		
2.	Patent application number (The Patent Office will fill in this part)	0215046.4		
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	<p>RECKITT BENCKISER (UK) LIMITED</p> <p>RECKITT BENCKISER PLC.</p> <p>DANSOM LANE</p> <p>HULL</p> <p>HU8 7DS</p> <p>UNITED KINGDOM</p> <p>103-105 BATH ROAD</p> <p>SLOUGH</p> <p>BERKSHIRE SL1 3UH</p> <p>UNITED KINGDOM</p> <p>Patents ADP number (if you know it)</p> <p>0772136004</p> <p>If the applicant is a corporate body, give the country/state of its incorporation</p> <p>UNITED KINGDOM</p>		
4.	Title of the invention	CANDLE COMPOSITION AND CANDLES MADE THEREFROM		
5.	Name of your agent (if you have one)	JOHN CRAUFORD MCKNIGHT		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	<p>RECKITT BENCKISER PLC</p> <p>DANSOM LANE</p> <p>HULL</p> <p>HU8 7DS</p> <p>UNITED KINGDOM</p>		
	Patents ADP number (if you know it)	07800303001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8.	<p>Is a statement of inventorship and of right to grant of a patent required in support of this request?</p> <p>(Answer 'Yes' if:</p> <p>a) any applicant named in part 3 is not an inventor, or</p> <p>b) there is an inventor who is not named as an applicant,</p> <p>or</p> <p>c) any named applicant is a corporate body.</p> <p>See note (d))</p>			

Patents Form 1/77

1. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 9

Claim(s) 2

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents (Please specify)

11

I/We request the grant of a patent on the basis of this application.

Signature

Date



28/6/02

12. Name and daytime telephone number of person to contact in the United Kingdom

~~Paul Robinson~~
~~01482 326151~~

JOAN CRAWFORD McKnight
01482 583 719

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.

CANDLE COMPOSITION AND CANDLES
MADE THEREFROM

5 This invention relates to candle compositions, in particular candle compositions made from paraffin wax, and to candles made therefrom.

As is well known, in addition to their use as a means for providing light, candles are popular for their aesthetic appeal, both in terms of the type of light which they produce and also their appearance as articles, as well as being a means of delivering a fragrance or other air-borne agent to an environment.

10 The manufacture of good quality candles is determined by several criteria which need to be met by the composition formulation from which the candle is made.

15 Among these criteria are the following:-

Low shrinkage: Where a candle wax is to be used to fill a glass container the shrinkage of the composition should of course be as low as possible in order to avoid the presence of voids between the solidified wax and the glass vessel.

20 Transparency of the pool when the candle is burning: Ideally the pool of molten wax at the base of the flame should be transparent.

25 Size of the pool: This should not be too small as this usually indicates poor burning illustrated in extreme cases by a phenomenon of "tunnelling".

30 Residue left after burning candle and particularly at the end of life: In general the smaller the amount of residue left after burning the better.

35 The post burning aesthetics of a candle should also be good; that is, the residual wax should not have a burnt appearance.

Other important criteria include the melting point of the wax. This is ideally around 50°C, for example, from about 45°C to about 55°C. If the melting point is lower than this then a problem of stability can arise in warmer countries but if the

40

melting point of the wax is higher than this, in the case where the candle contains a fragrance or other air-borne agent it is not so easily released because the higher melting waxes hold on to the fragrance too effectively. An additional consideration is that higher melting point waxes tend not to burn so well and tend to leave more residue on the glass container. Also generally, Low Melting Point waxes shrink less than higher Melting Point waxes.

The present invention relates to the concept of producing a paraffin wax composition which produces an optimum combination of all or most of the criteria mentioned above. In particular, it has been discovered that a wax composition which comprises a mixture of a relatively hard paraffin wax with a relatively soft paraffin wax enables the composition to more closely fulfil or approach an optimum combination of the criteria which are explained above.

Specifically, the present invention provides a paraffin wax candle composition comprising a mixture of a hard paraffin wax and a soft paraffin wax the hard wax having a penetration value as measured by the Needle Penetration Test as defined in ASTM D 1321 of no more than 25 and the soft wax having a penetration value of no less than 45, the composition itself having a penetration value between 30 and 50. A mixture of a paraffin wax which gives a penetration test result of 16-20 in the ASTM D 1321 penetration test together with a paraffin wax which shows a penetration of 50-70 in the same test gives a candle wax composition which is particularly suitable.

Preferably the proportion of the hard wax to the soft wax is in the range from 50:50 to 10:90, and can, for example, be about 30:70.

The actual percentage by weight of the hard wax plus soft wax in the candle-making composition will depend on the amounts of other additives which can typically be included in the composition.

Thus, preferably the composition contains a microcrystalline wax in the amount of preferably up to

1% by weight. The function of the microcrystalline wax is to give the candle a more smooth, glossy appearance, if required; that is to give the candle a better aesthetic appearance. Microcrystalline wax can also improve fragrance retention.

Additionally, or alternatively the composition may contain polyethylene in an amount of preferably up to 1% by weight. Polyethylene can give some benefit in terms of fragrance retention and aesthetic.

Additionally, or alternatively the composition may contain Vybar to help in reducing air bubbles, to inhibit mottling and to enhance fragrance and colour retention. Preferably up to 0.2 % by weight is present.

The composition may comprise further components preferably from 1 to 20 % by weight, such as one or more compounds selected from fragrances, malodour counteractants, insecticides, pesticides, insect repellents, colorants, anti-oxidants, preservatives, anti-ingestion agents, stabilisers, insect repellents, deodorizers and masking agents.

The fragrance or other air-borne agent, and for this purpose the fragrance or other agent may preferably be present in the composition up to an amount of 10% by weight. Suitable fragrances are generally known in the art, for example one comprising fragrant material selected from one or more of the following cedarwood oil, sandalwood, bergamot, Bulgarian rose oil, patchouli, myrrh, vanilla, clove leaf oil, linalol, ethyl alcohol, tepineol, menthol, citronellal and phenyl ethyl alcohol. The fragrance normally comprises a carrier solvent such as diethylphthalate, carbitol, dipropyleneglycol, or dipropylglycol.

Suitable malodour counteractants are well known, for example is one or more aroma and/or non-aroma chemicals which are known to have an action in reducing the perception of the intensity of malodours for example unsaturated esters, ketones, aldehydes, and/or fragrant materials such as citronellal or

cedarwood oil (which is known to counteract the perception of tobacco malodour). Preferably 0.1 to 10 % by weight are present.

5 Suitable insecticides, pesticides and insect repellents are well known for use in the invention for example a pyrethroid, niotinoid, rotenoid, tetramethrin, bioallerthrin, allethrin, phenthrin, dinitrophenol, organothiocyamate, benzene
10 hexachloride, citronellal, a polychlorinated cyclic hydrocarbon (for example heptachlor, aldrin or telodrin) or an organophosphorous compound for example tetraethyl pyrophosphate). Preferably 1 to 10 % by weight is present.

15 Also, the present invention is particularly useful in the manufacture of coloured or tinted candles and to this end a dye, pigment or other colouring material which is soluble in wax may be included in the composition up to an amount of preferably 0.5% by weight. Suitable dyes and pigments
20 are generally known in the art, for example pigment ivory, pigment cobrizo, Iragon Green, Iragon Violet, Sandoplast Blue 2B and Fat Red 5B02. The dyes can be either in the form of solid cakes or chips, a powder or a liquid.

25 A suitable anti-oxidant is, for example, tocopherol, ascorbyl palmitate, butylated toluene, ascorbic acid, tert-butyl hydroquinone, beta carotene, butylated hydroxy toluene or a gallate. Preferably 0.1 to 2 % by weight of an antioxidant may be present in
30 the composition.

 Suitable preservatives are quaternary alkyl ammonium compounds or imidazolinium derivatives. Preferably 0.1 to 2 % by weight of a preservative may be present in the composition.

35 The candle product can be in any suitable form known in the art. It may take the form of a taper candle, a votive candle, a tea light or a column candle or may be contained in a jar or other
40 container. Such candles preferably contain a wick, but could also comprise a wickless taper. The wick, if

present may be any conventional consumable wick material, such as cotton, cellulose, nylon, or paper. The wick may preferably be located in the centre of the candle, or may be off centre as desired. The
5 presence of two or more wicks is also within the scope of the present invention. Non consumable wicks of an appropriate design, such as fibreglass, could conceivably be used, but in the past have been found to present problems of poor burn characteristics and
10 excessively large flame when employed in conventional candles.

The preparation of the paraffin wax blended composition is quite conventional and the skilled person needs no specific guidance in this respect and
15 the same applies to the manufacturing procedures which can be used for making candles from candle wax compositions. A candle is formed by first coating the wick to be used in the candle with a "core composition". The "core composition" can comprise any
20 suitable paraffin wax. In a preferred embodiment the "core composition" may contain a pigment, dye or other colouring material. In the present invention the "core composition" preferably comprises Paraffin 5203 in an amount of at least 90% by weight of the "core
25 composition", more preferably at least 99% by weight of the "core composition" and most preferably 99.9 % by weight of the "core composition". The candle composition in a liquid state is then poured and set surrounding the wick coated with the core composition.

30 An example of a hard paraffin wax which is suitable for use in the present invention is one which is designated paraffin wax 5203 (Tradename) and whose characteristics are set out below.

35 An example of a soft paraffin wax which can be used in this invention is one which is designated paraffin wax 6214 (Tradename) and whose characteristics are also set out below. Another soft paraffin wax which may be used in the present
40 invention is one which is designated paraffin wax 6213 (Tradename) and whose characteristics are set out

below. In a preferred embodiment paraffin wax 6214 is used.

5 These waxes have various synonyms to describe them and these are also set out below under the CAS numbers which are appropriate to them.

Composition	Paraffin 5203 Solid saturated Hydrocarbons C_nH_{2n+2}	Paraffin 6214 Solid saturated Hydrocarbons C_nH_{2n+2}	Paraffin 6213 Solid saturated Hydrocarbons + Triglyceride < 25%
CAS No.	64742-51-4, 8002-74-2	64742-51-4	Paraffin: 64742-51-4, 8002-74-2 Triglyceride: 84540-04-5
EINECS No.	266-154-5, 232-315-6	265-154-5	Paraffin: 265- 154-5, 232- 315-6 Triglyceride: 283-093-2
Physical Description	At 20°C, waxy solid	At 20°C, waxy solid	At 20°C, waxy solid
Colour	White	Whitish	White / Whitish
Odour	Practically odourless	Practically odourless	From neutral to slightly fatty like
Congealing point	52-54°C	48-52°C	42-46°C
Penetration test at 25°C (dmm)	16-20	50-70	70-100
Flash point	>150°C	>150°C	>150°C
Viscosity (100°C)	2.5-10 mm ² /s	4.0-6.0 mm ² /s	4.0-5.0 mm ² /s

CAS No. 64742-51-4/Synonyms..Paraffin waxes, petroleum, hydrotreated

Cas No. 8002-74-2/Synonyms ...Paraffin Wax; Paraffin waxes: Paraffin wax (petroleum); Poly(methylene)wax; Wax extract; Paraffin wax fume; Fischer-tropsch wax; Cream E45; Derma-Oil; Duratears; Granugen; Parachoc; Replens; Paraffin Wax, granular;

10 It should be noted that all three paraffins appear to be fairly similar but differ significantly in some of their physical properties, in particular the penetration values and also their congealing points, the latter it will be seen being appropriate to provide a melting point of the overall composition

around 50°C as explained hereinbefore.

As a specific example of a candle composition in accord with the present invention the proportion of ingredients are set out below.

5

Candle Composition

10

% by weight
per mix

Core Composition

15

Paraffin 5203	99.898
Pigment Ivory 15-1641	0.1
Pigment Cobrizo 29-627	0.002

Wax Composition

20

Paraffin 6214	65.64
Paraffin 5203	28.20
Fir Vanilla Light 175297E	5.41
Microcrystalline Wax 1800	0.65
Pigment Ivory 15-1641	0.09
Pigment Cobrizo 29-627	0.01

25

The proportion by weight of the Core composition to the wax composition is approximately 26:74.

30

The invention will be illustrated by the following Example:

Method of Manufacture of the Candle

35

1) Core Production and wicking

40

The appropriate amount of paraffin 5203 is weighed into a mixing tank. The appropriate amounts of the pigment ivory and pigment cobrizo dyes are then added to the same tank. The tank temperature is maintained

at 60 to 65°C whilst the contents of the tank are stirred until the dye has melted and completely dispersed.

- 5 The resulting coloured liquid wax is then fed to a spraying drum feed tank. The powder is sprayed and pumped via pipes to a powder press.

- 10 The appropriate wick is loaded into a wicking machine adjacent to the powder press. The specified length of wick is automatically inserted on line through the core and a metal sustainer is secured to the end.

2) Wax Blend

- 15 The appropriate amounts of Paraffin 5203, Paraffin 6214 and microcrystalline wax are transferred to a mixing vessel. The vessel temperature is maintained at approximately 65°C whilst the mixture is stirred until
20 all components have been fully melted and dispersed.

- 25 The appropriate amounts of Pigment Ivory, Pigment Cobrizo and Fir Vanilla Light are then added to the mixing vessel. The vessel temperature is maintained at a temperature of from 60 to 65°C until the dye has completely melted and has been dispersed in the mixture.

3) Filling Line

- 30 The wick assembly/coloured core is transferred into a glass jar. The glass jar is heated to 55 to 60°C by passing the glass jar through a glass heater.

- 35 The glasses are then filled with the wax blend via calibrated filling heads.

- 40 The filled glasses are then passed through a cooling tunnel and then an infra red "Flash" heater, which removes air bubbles and smoothes the wax surface.

- 9 -

The glasses are then passed through a second cooling unit.

CLAIMS

1. A paraffin wax candle composition comprising a mixture of a hard paraffin wax and a soft paraffin wax the hard wax having a penetration value as measured by the Needle Penetration Test as defined in ASTM D 1321 of no more than 25 and the soft wax having a penetration value of no less than 45, the composition itself having a penetration value between 30 and 50.
2. A composition as claimed in claim 1 which the hard wax has a penetration value of 16-20 and the soft wax has a penetration value of 50-70.
3. A composition as claimed in claim 1 or claim 2 wherein the proportion by weight of the soft wax to the hard wax is in the range 50:50 to 90:10.
4. A composition as claimed in claim 3 wherein the proportion by weight of the soft wax to the hard wax is about 70:30.
5. A composition as claimed in any one of the preceding claims wherein the melting point of the composition is in the range from 45°C to 55°C.
6. A composition as claimed in claim 5 wherein the melting point of the composition is about 50°C.
7. A composition as claimed in any one of the preceding claims which contains a microcrystalline wax in an amount up to 1% by weight.
8. A composition as claimed is in any one of the preceding claims which contains a polyethylene in an amount up to 1% by weight.
9. A composition as claimed in any one of the preceding claims which contains a colouring material in an amount up to 0.5% by weight.

10. A composition as claimed in any one of the preceding claims which contains a fragrance and/or other air-borne agent or agents in an amount up to 10% by weight.
- 5
11. A composition as claimed in claim 1 substantially as hereinafter exemplified.
- 10
12. A candle whenever comprising a composition as claimed in claim 1.
- 15
13. A candle as claimed in claim 12 comprising a container in which the candle composition in a liquid state has been poured and set surrounding a candle wick.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.